



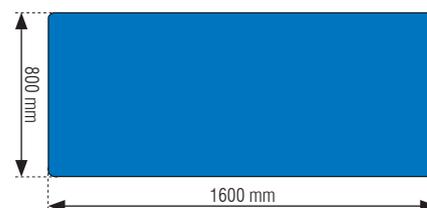

Rectangular and electrically heated ironing table, with or without boiler

- Utility vacuum table with electrically heated board
- Adjustable temperature of the board by means of a thermostat
- Built-in single phase vacuum unit
- Available either with STANDARD or with MAXI board
- Steam iron assembly included in the version with boiler

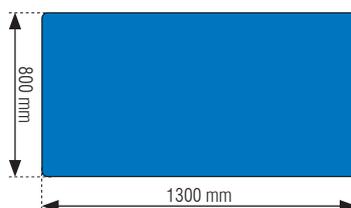

Technical Specifications	EOLO M (1300x800) EOLO M AF (1300x800)	EOLO M (1600x800) EOLO M AF (1600x800)	EOLO M * (1300x800)	EOLO M * (1600x800)
Voltage	230V/400V/1/50-60 Hz	230V/400V/1/50-60 Hz	230V/400V/1-3/50-60 Hz	230V/400V/1-3/50-60 Hz
Boiler heater	--	--	3.3-3.9-4.8 kW	3.3-3.9-4.8 kW
Iron heater	0,830 kW	0,830 kW	0,830 kW	0,830 kW
Board heater	1-1,5 kW	1-1,5 kW	1 kW	1,5 kW
Suction motor	0,45 kW	0,45 kW	0,45 kW	0,45 kW
Steam pressure	--	--	2,8 bar	2,8 bar
Water inlet	--	--	3/8"	3/8"
Boiler exhaust	--	--	3/8"	3/8"
Board dimensions	1300x800 mm	1600x800 mm	1300x800 mm	1600x800 mm
Overall dimensions	1300x840x920 mm	1600x840x920 mm	1300x840x920 mm	1600x840x920 mm
Net weight	108 Kg	113 Kg	132 Kg	142 Kg
Gross weight (cart-pallet)	127 Kg	--	151 Kg	--
Gross weight (crate)	--	180 Kg	--	209 Kg
Packing dimensions	1330x970x1080 mm	1780x960x1170 mm	1330x970x1080 mm	1780x960x1170 mm

- ### Options
- Swinging arm with suction and heated sleeve shape
 - Swinging arm with suction and heated egg shape
 - Swinging arm with suction and spotting shape
 - Built-in electric and automatic steam boiler with iron
 - Water pump (for versions with boiler)
 - Steam iron assembly (for versions without boiler)
 - Steam gun
 - Steam air gun
 - Water spray gun with or without support
 - Sliding trolley with balancer, with or without lighting
 - Lighting

(*) With boiler

The firm reserves the right to make any necessary modification without notice.