

## TUMBLE DRYERS

**DX**  
RANGE

**DX 25**

**DX 34**

25KG  
50LB

34KG  
75LB



### FEATURES

- Controls:
  - Dual Digital Control or OPL Micro
  - Coin operated version: XQ-Control
- Electrical, Gas and Steam heating
- Large door opening for easy loading and unloading (Ø 68cm)
- Galvanized drum
- Radial airflow
- Large lint filter

### OPTIONS

- Stainless steel drum
- Stainless steel front panel with black painted door
- Coin operated version
- Reversing drum
- Residual moisture control Sensodry+® (only with Full OPL Micro):
  - lower energy and utility costs
  - lower linen replacement costs
- SafeTech™ Fire Suppression System



FAST DRYING



EASY OPERATION




LARGE DOOR OPENING

senso.dry+

SafeTech™

TYPE		DX25	DX34
<b>CAPACITY</b>			
Capacity	kg	25	34
Drum volume	l	530	634
Drum diameter	mm	Ø 940	Ø 940
<b>AIRFLOW</b>			
Airflow	l/s	330	380 (G 330)
<b>DRYING AVERAGE</b>			
Gas heating	g/min	476	571
Electric heating	g/min	390	521
<b>MOTOR</b>			
Fan	kW	0,4	0,4
Drive	kW	0,4	0,4
<b>GAS HEATING</b>			
Energy	kW	38,1	48,4
Energy	kBTU/h	130	165
Electrical connection		1×100-120V/50-60Hz, 1-3×200-240V/50-60 Hz 3×440-480V/50-60Hz, 3×380-415V/50-60Hz	
Gas connection	NPT	½"	½"
<b>STEAM HEATING</b>			
High pressure 6,9 bar	kW kBTU/h	33,29 113,6	39,24 133,9
Electrical connection		1×100-120V/50-60Hz, 1-3×200-240V/50-60 Hz 3×440-480V/50-60Hz, 3×380-415V/50-60Hz	
Steam connection	NPT	¾"	¾"
<b>ELECTRICAL HEATING</b>			
Energy	kW	30	36
Electrical connection		1×200-208V/50-60Hz, 3×200-208V/50-60Hz, 1x 230-240V/50-60Hz, 3x 230-240V/50-60Hz, 3x 380V/50-60Hz, 3x400-415V/50-60Hz, 3x 440V/50-60Hz, 3x 460-480V/50-60Hz	
<b>EXHAUST</b>	Ø /mm	200	200
<b>DIMENSIONS</b>			
Size H×W×D	mm	1960×980×1190	1960×980×1350
Net weight (E, G, S)	kg	310, 295, 315	320, 310, 325
<b>TRANSPORT DATA</b>			
Packed (foil E, G) H×W×D	mm	2060×1050×1270	2060×1050×1420
Packed (foil S) H×W×D	mm	2120×1050×1270	2120×1050×1420
Gross weight (foil,E,G,S)	kg	330, 320, 335	340, 330, 350
Packed (crate) H×W×D	mm	2240×1170×1350	2240×1170×1500
Gross weight (crate,E,G,S)	kg	395, 380, 400	410, 395, 415

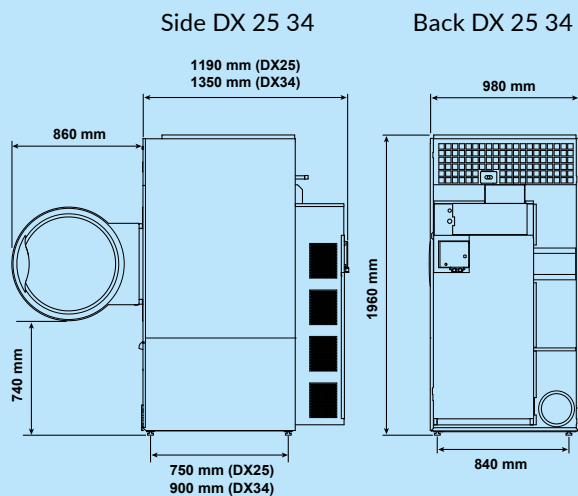

The Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

[www.primuslaundry.com](http://www.primuslaundry.com)

Primus by Alliance Laundry Systems

